

MADE IN U.S.A



# MINI Circuit Breakers Model MN 4




Direct replacement for "mini" automotive style fuses  
"Permanently" eliminates the need to replace blown Mini fuses

## SPECIFICATIONS


- Amp Ratings : 4, 5, 7.5, 10, 15, 20, 25, 30, 40
- Voltage Ratings : 14 VDC ; 28VDC
- Operating Temperature : -40 F to 185 F (-40 C to 85 C).
- Storage Temperature : -40 F to 260 F (-40 C to 125 C).
- Housing : UL Rated 94 VO Thermoplastic ( Non - Conductive housing eliminates dangers of internal parts shorting to case ).
- Terminal Type : Compatible with Mini fuse blocks
- Versions : Type I : Automatic reset.
- Approvals : Meets or exceeds SAE standard J553 Type I and Type III Circuit Breakers.
- Part Weight : 2.3 grams (.081 oz.)

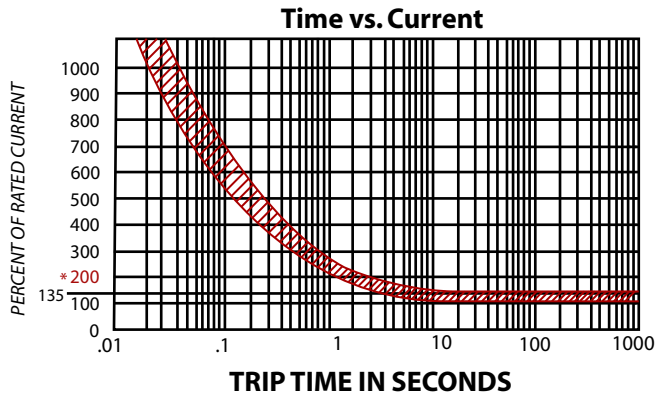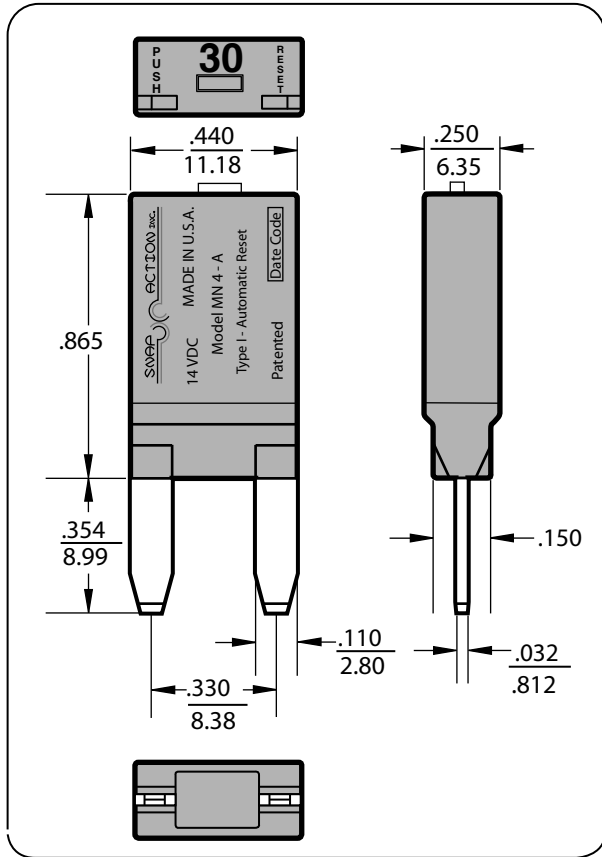


Overload	25° & 70° C Trip Time
250 % overload	0.8 - 1.8 seconds
300 % overload	0.5 - 1.1 seconds
400 % overload	0.3 - 0.6 seconds
500 % overload	0.2 - 0.3 seconds
* 200 % overload	1.5 - 3.9 seconds

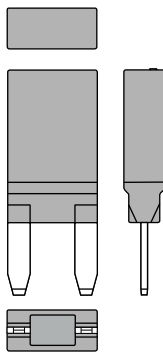

ACTUAL SIZE  
Smallest in the industry



## ORDERING INFORMATION



- Automatic Reset ( Type I )**
  - Upon overload the breaker cycles continuously during an overload condition until the overload is removed or corrected.
- Remote Reset ( Type II )**
  - Upon overload the breaker opens and remains opened as long as power is available or the overload is removed.
- Manual Reset ( Type III )**
  - Upon overload the breaker opens and remains open until the breaker is manually reset.

Reset Type	Amp Rating
A	4 30
	5 35
R	10 40
	15
	20
M	25



www.snapaction.net

1260 Rt.22 West

Mountainside, N.J. 07092 U.S.A.

Phone: 908-654-4380